

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Overview



Pointek CLS500 is an inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic, and aggressive chemicals in critical conditions of high temperature and pressure.

5

Benefits

- Patented Active-Shield technology so measurement is unaffected by material buildup in active shield section
- 2-wire loop powered with solid-state switch or 4 to 20/20 to 4 mA output
- Simple push-button calibration and integrated local display
- Full function diagnostics
- HART communications for remote commissioning and inspection

Application


Patented Active-Shield technology ensures that measurement is unaffected by vapours, product deposits, dust and condensation. The unique mechanical probe design coupled with a high performance transmitter gives superior performance in a wide range of level detection applications.

Pointek CLS500's microprocessor-based electronics provide one-point calibration, making setup possible without shutting down your production process.


- Key Applications: foam or liquid/foam level, glycol regenerators, high-pressure coalescers, LNG applications

Configuration


Installation

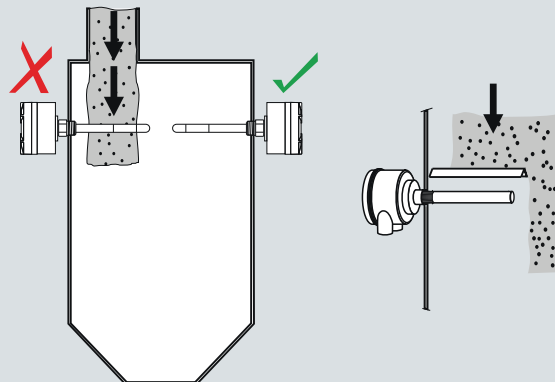

Keep unit out of path of falling material, or protect probe from falling material.

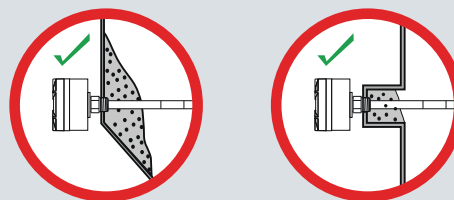

Build up of material in active shield area does not affect switch operation.

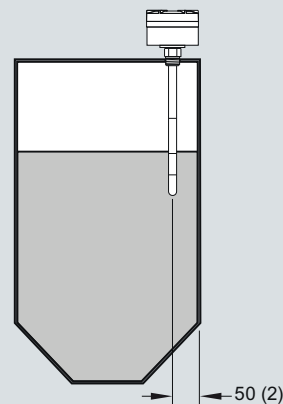

Install probe at least 50 (2) from tank wall.

Pointek CLS500 installation, dimensions in mm (inch)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Technical specifications

Input

Measuring range	0 ... 330 pF
Span	Min. 1 pF

Output

Solid-state switch	
• Output	Galvanically isolated
• Protection	Against reversed polarity (bipolar)
• Max. switching voltage	30 V (DC) 30 V peak (AC)
• Max. load current	82 mA
• Voltage drop	< 1 V, typical at 50 mA
• Time delay (pre or post switching)	1 ... 60 s
Current loop	4 ... 20 mA/20 ... 4 mA

Accuracy (transmitter)

Temperature stability	0.15 pF (0 pF) or < 0.25% (typical < 0.1%) of actual measurement value, whichever is greater over the full temperature range
Non-linearity and repeatability	0.1% of full scale and actual measurement respectively
Accuracy	Deviation < 0.1% of measured value

Rated operating conditions ¹⁾

Installation conditions	
- Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature (transmitter)	-40 ... +85 °C (-40 ... +185°F) ²⁾
• Installation category	I
• Pollution degree	4
Medium conditions	
• Relative dielectric constant ϵ_r	Min. 1.5
• Process temperature	Temperature ratings are pressure dependent. See Pressure/Temperature curves on page 5/71.
- Standard (PFA)	-50 ... +200 °C (-58 ... +392 °F)
- High temperature stainless steel version with thermal isolator	-60 ... +400 °C (-76 ... +752 °F)
- Cryogenic version	-200 to +200 °C (-328 ... +392 °F)
	Contact ceg.smpi@siemens.com for details.
Process pressure	Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/71.
• Standard (PFA)	-1 ... +150 bar g (-14.6 ... +2175 psi g)
• High temperature version (Stainless steel)	-1 ... +35 bar g (-14.6 ... +507.6 psi g)

Design

Material	
• Wetted parts material	316L stainless steel
- Standard rod	PFA
• Probe isolation (rod)	
Probe diameter	
• Standard rod version (PFA)	16 mm (0.63 inch)
• High temperature rod version (Stainless steel)	19 mm (0.75 inch)
Probe length	
• Standard rod version (PFA)	Max. 1000 mm (39.4 inch) with 16 mm (0.63 inch) diameter probe
• High temperature rod version (Stainless steel)	Max. measuring length 1000 mm (39.4 inch) with 19 mm (0.75 inch) diameter probe
Process connection of probe	
• Threaded mounting	NPT [(Taper), ANSI/ASME B1.20.1] R [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] ASME, EN 1092-1
• Flange mounting	
Enclosure	
• Material	Aluminium, epoxy-coated (Stainless steel option available. Contact ceg.smpi@siemens.com)
• Cable inlet	2 x ½" NPT
• Degree of protection	Type 4X/NEMA4X/IP65, IP68
Power supply	Max. 33 V DC
Features	
Measurement current signalling	NAMUR NE 43
Safety	Inputs/outputs fully galvanically isolated Polarity-insensitive current loop Fully potted Integrated safety barrier
• Diagnostics with fault alarm when:	Primary variable (PV) out of limits, system failure in measurement circuit, deviation between A/D and D/A converter, check sum, watch dog and self-checking facility
• Function rotary switch	Positions 0 to 9, A to F
• SMART communication	Conforming to HART Communication Foundation (HCF)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Certificates and approvals

General Purpose	CE, CSA/FM, C-TICK
Non incendive/Non sparking	CSA/FM Class I, Div. 2, Groups A, B, C, D T4 ATEX II 3G 2D EEx n A [ib] IIC T6 to T4 T100 °C
Dust Ignition Proof	CSA/FM Class II and III, Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] T6 to T1 T100 °C
Explosion Proof	FM Class 1, Div. 1, Groups A, B, C, D T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C
Marine	Lloyds Register of Shipping, Categories ENV1, ENV2, ENV3, ENV5, Bureau Veritas

- 1) When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/71.
- 2) Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F)


Pointek CLS500 probe version	Standard	HT Series
Process connection types	Standard (PFA) (7ML5601, 7ML5602, 7ML5603)	High Temperature (Enamel or Stainless steel) (7ML5604)
Threaded	Available as standard	–
Flange	Available as standard	Available as standard
Process connection materials		
316L stainless steel	Available as standard	Available as standard
Probe insulation		
None	–	HT Stainless: available as standard
PFA	Available as standard	–
Length parameters		
Max. rod length	1000 mm (40 inch)	1000 mm (40 inch)
Process conditions¹⁾		
Max. process pressure	150 bar g (2175 psi g)	Stainless steel: ²⁾ 35 bar g (507 psi g)
Max. process temperature	+200 °C (+392 °F)	+400 °C (+752 °F)

- 1) When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/71. Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/71.
- 2) Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/71.
- Not available as standard

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500


Selection and Ordering data	Order No.
Pointek CLS500, threaded Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	C) 7ML5601- 
Electronic transmitter No transmitter supplied MSP 2002-1 (330 pF)	0 1
Process connection ¾" 1" 1¼" 1½" 2"	A B C D E
Threaded connection and rating NPT [(Taper), ANSI/ASME B1.20.1] R [(BSPT), EN 10226/PT (JIS-T) JIS B 0203] G [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	A B D
Probe insulation/material of process connection PFA insulation/316L stainless steel	1
Approvals General Purpose: CE, CSA/FM, C-TICK CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3GD 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	1 2 4 6
Probe/electrode diameter 16 mm (0.63 inch) rigid rod, minimum insertion length 200 mm (7.9 inch), maximum insertion length 1000 mm (39.4 inch) ¹⁾	1
Thermal isolator/remote version Rigid thermal isolator [for process connection temperature over +85 °C (+185 °F)] No thermal isolator	A B

¹⁾ Add order code Y01 and Y02 in plain text:
"Insertion/active shield length to mm"

C) Subject to export regulations AL: N, ECCN: EAR99.

Selection and Ordering data	Order code
Further designs	
Please add " -Z " to Order No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	Y01
Active Shield length - minimum length is 50 mm Y02: to mm ¹⁾	Y02
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11
Inspection Certificate Type 3.1 per EN 10204	C12
Operating Instructions	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/70
Pointek Specials	See page 5/79

¹⁾ See dimension drawings on page 5/76 for further explanation of Y02

Selection and Ordering data	Order No.
Pointek CLS500, welded flange Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	C) 7ML5602- 
Electronic transmitter MSP 2002-1 (330 pF)	1
Process connection and pressure rating <u>Welded flange, 316L stainless steel, raised face</u> 2" ASME, 150 lb 2" ASME, 300 lb 3" ASME, 150 lb 3" ASME, 300 lb ¹⁾ 4" ASME, 150 lb ¹⁾ 4" ASME, 300 lb ¹⁾ 6" ASME, 150 lb ¹⁾ 6" ASME, 300 lb ¹⁾ <u>Welded flange, 316L stainless steel, Type A flat faced</u> DN 50 PN 16 DN 50 PN 40 DN 80 PN 16 DN 80 PN 40 DN 100 PN 16 ¹⁾ DN 125 PN 16 ¹⁾ (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	AA AB BA BB CA CB DA DB EC ED FC FD GC HC
Probe insulation/material of process connection PFA insulation/316L stainless steel	1
Approvals General Purpose CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3G 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	1 2 4 6
Probe/electrode diameter 16 mm (0.63 inch) rigid rod, min. length 200 mm (7.9 inch), max. length 1000 mm (39.4 inch)	1
Thermal isolator Rigid thermal isolator [for process temperature over +85 °C (+185 °F)] No thermal isolator	A B

¹⁾ Custom shipping methods required. Contact factory for more details.

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data

Order code

Further designs

Please add **"-Z"** to Order No. and specify Order code(s).

Total insertion length: enter the total insertion length in plain text description

Y01

Active Shield length - minimum length is 50 mm. Y02: to mm¹⁾

Y02

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text

Y15

Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000

C11

Inspection Certificate Type 3.1 per EN 10204

C12

Operating Instructions

Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.

See page 5/70

Pointek Specials

See page 5/79

¹⁾ See dimensional drawings on page 5/76 for further explanation of Y02

Selection and Ordering data

Order No.

Pointek CLS500, single piece flange

C) 7ML5603-

Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.

- A 0

Electronic transmitter

MSP 2002-1 (330 pF)

1

Process connection and pressure rating

Single piece flange, 316L stainless steel, raised face

2" ASME, 150 lb

AA

2" ASME, 300 lb

AB

3" ASME, 150 lb

BA

3" ASME, 300 lb¹⁾

BB

4" ASME, 150 lb¹⁾

CA

4" ASME, 300 lb¹⁾

CB

6" ASME, 150 lb¹⁾

DA

6" ASME, 300 lb¹⁾

DB

Single piece flange, 316L stainless steel, Type B1 raised faced

DN 50 PN 16

EC

DN 50 PN 25

ED

DN 80 PN 16

FC

DN 80 PN 25

FD

DN 100 PN 16¹⁾

GC

DN 100 PN 25¹⁾

GD

DN 125 PN 16¹⁾

HC

Probe insulation/material of process connection

PFA insulation/316L stainless steel

1

Approvals

General Purpose: CE, CSA/FM, C-TICK
CSA/FM Class I, Div. 2, Groups A, B, C, D T4;
ATEX II 3G 2D EEx nA [ib] IIC T6 to T4 T100 °C;
CSA/FM Class II and III Div. 1, Groups E, F, G T4

1

2

ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C

4

FM Class I, Div. 1, Groups A, B, C, D T4

6

Probe/electrode diameter

16 mm (0.63 inch) rigid rod, maximum length 1000 mm (39.4 inch) (Y01)

1

Thermal isolator

Rigid thermal isolator [for process connection temperature over +85 °C (+185 °F)]

A

No thermal isolator

B

¹⁾ Custom shipping methods required. Contact factory for more details

C) Subject to export regulations AL: N, ECCN: EAR99.

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data	Order code	Selection and Ordering data	Order No.
Further designs Please add "-Z" to Order No. and specify Order code(s).		Pointek CLS500 High temperature Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	C) 7ML5604- A - - - - -
Total insertion length: enter the total insertion length in plain text description	Y01	Electronic transmitter MSP 2002-1 (330 pF)	1
Active Shield length - minimum length is 50 mm.Y02: to mm ¹⁾	Y02	Process connection and pressure rating <u>316L stainless steel, raised face¹⁾</u>	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	2" ASME, 150 lb	A 1
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	2" ASME, 300 lb	A 2
Inspection Certificate Type 3.1 per EN 10204	C12	2" ASME, 600 lb	A 3
		2" ASME, 900 lb	A 4
		3" ASME, 150 lb	B 1
		3" ASME, 300 lb ²⁾	B 2
		3" ASME, 600 lb ²⁾	B 3
		3" ASME, 900 lb ²⁾	B 4
		4" ASME, 150 lb ²⁾	C 1
		4" ASME, 300 lb ²⁾	C 2
		4" ASME, 600 lb ²⁾	C 3
		4" ASME, 900 lb ²⁾	C 4
		6" ASME, 150 lb ²⁾	D 1
		6" ASME, 300 lb ²⁾	D 2
		6" ASME, 600 lb ²⁾	D 3
		6" ASME, 900 lb ²⁾	D 4
		<u>316L stainless steel, Type B1 flat faced</u>	
		DN 50 PN 16	E 1
		DN 50 PN 25	E 2
		DN 50 PN 40	E 3
		DN 50 PN 63	E 4
		DN 80 PN 16	F 1
		DN 80 PN 25	F 2
		DN 80 PN 40 ²⁾	F 3
		DN 80 PN 63 ²⁾	F 4
		DN 100 PN 16 ²⁾	G 1
		DN 100 PN 25 ²⁾	G 2
		DN 100 PN 40 ²⁾	G 3
		DN 100 PN 63 ²⁾	G 4
		DN 125 PN 16 ²⁾	H 1
		DN 125 PN 25 ²⁾	H 2
		DN 125 PN 40 ²⁾	H 3
		DN 125 PN 63 ²⁾	H 4
		(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
Operating Instructions Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/70		
Accessories	See page 5/79		

¹⁾ See dimensional drawings on page 5/76 for further explanation of Y02

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data

Pointek CLS500 High temperature

Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.

Probe material of process connection

No insulation/316L stainless steel⁽³⁾⁴⁾

Stilling well

No stilling well

Approvals

General Purpose

CSA/FM Class I, Div. 2, Groups A, B, C, D T4;
ATEX II 3G 2D EEx nA [ib] IIC T6 to T4 T100 °C;
CSA/FM Class II and III Div. 1, Groups E, F, G T4

ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C

FM Class I, Div. 1, Groups A, B, C, D T4

Probe/electrode diameter


Maximum length 1000 mm (39.37 inch)⁴⁾

Thermal isolator

Rigid thermal isolator

Order No.

C) **7ML5604-**

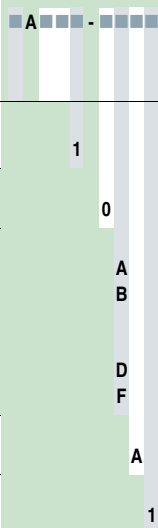

Selection and Ordering data

Further designs

Please add **"-Z"** to Order No. and specify Order code(s).

Total insertion length: enter the total insertion length in plain text description

Y01

Active Shield length - minimum length is 50 mm.Y02: to mm¹⁾

Y02

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text

Y15

Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000

C11

Inspection Certificate Type 3.1 per EN 10204

C12

Operating Instructions

English

C) **7ML1998-5GG02**

German

C) **7ML1998-5GG32**

French

7ML1998-5GG11

Dutch

7ML1998-5GG41

Note: The Operating Instructions should be ordered as a separate line on the order.

This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.

Pointek Specials

See page 5/79

1) See dimensional drawings on page 5/76 for further explanation of Y02

C) Subject to export regulations AL: N, ECCN: EAR99.

- 1) Welded flange for no insulation option only
2) Custom shipping methods required
3) Non-conductive material only, stainless steel non-insulated probe diameter 19 mm (0.75 inch)
4) Add order code Y01 and Y02 in plain text: "Insertion/active shield length to mm"
Minimum insertion length depends on probe version selected. See dimensional drawings on page 5/76 for more details.
- C) Subject to export regulations AL: N, ECCN: EAR99.


Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Characteristic curves

Pressure/temperature curve
CLS500 rod probes
Threaded process connections
(7ML5601)

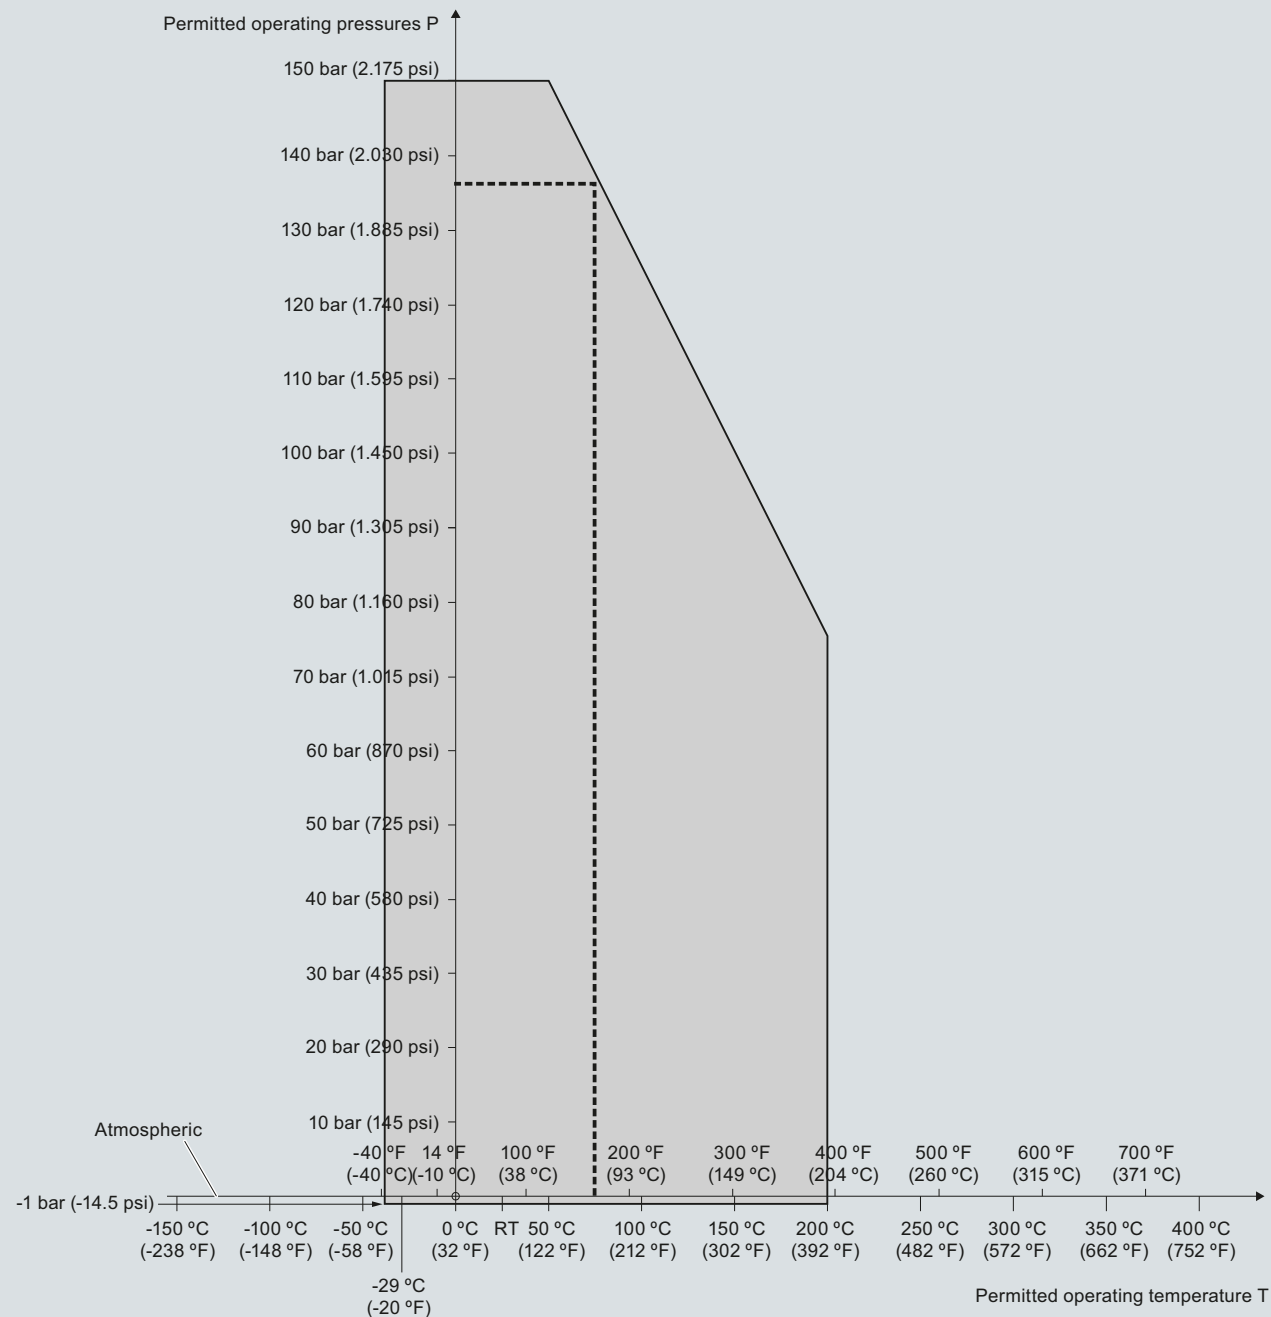

--- Example:
Permitted operating pressure = 137 bar (1988 psi) at 75 °C

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5601)


5

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pressure/Temperature Curve
CLS500 Rod Probes
ASME Flanged Process Connections
(7ML5602 and 7ML5603)

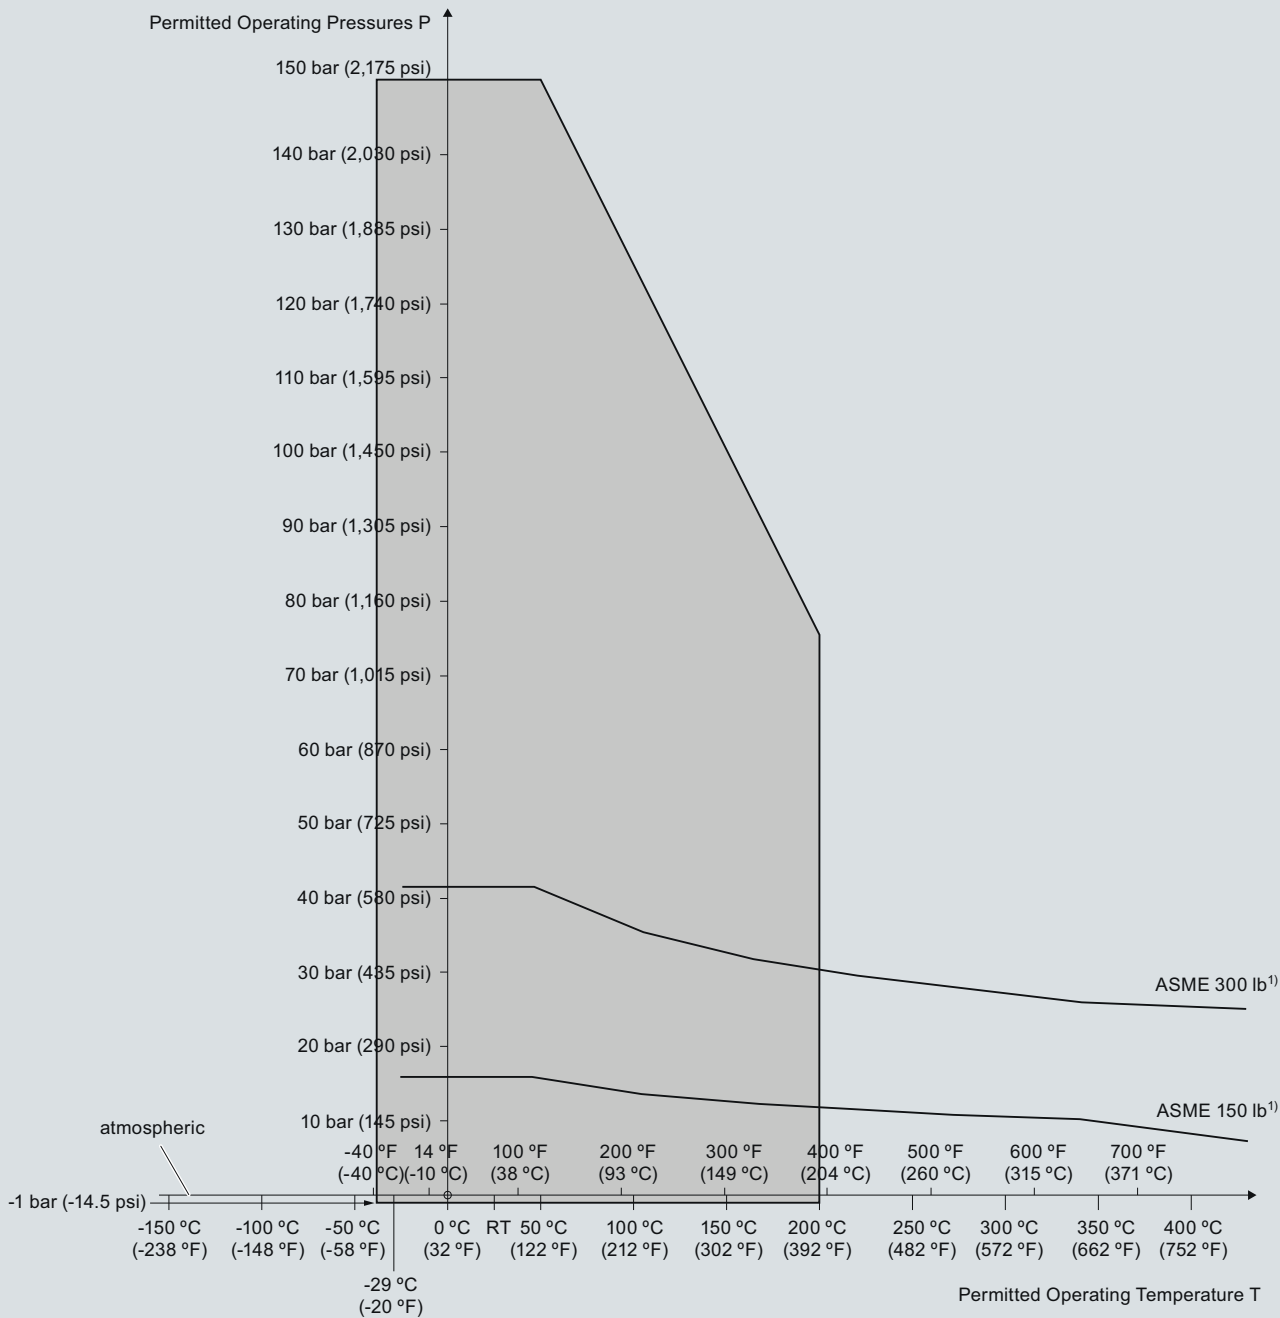

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5602 and 7ML5603)

5


Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

5

Pressure/Temperature curve
CLS500 Rod Probes
EN Flanged process connections
(7ML5602 and 7ML5603)

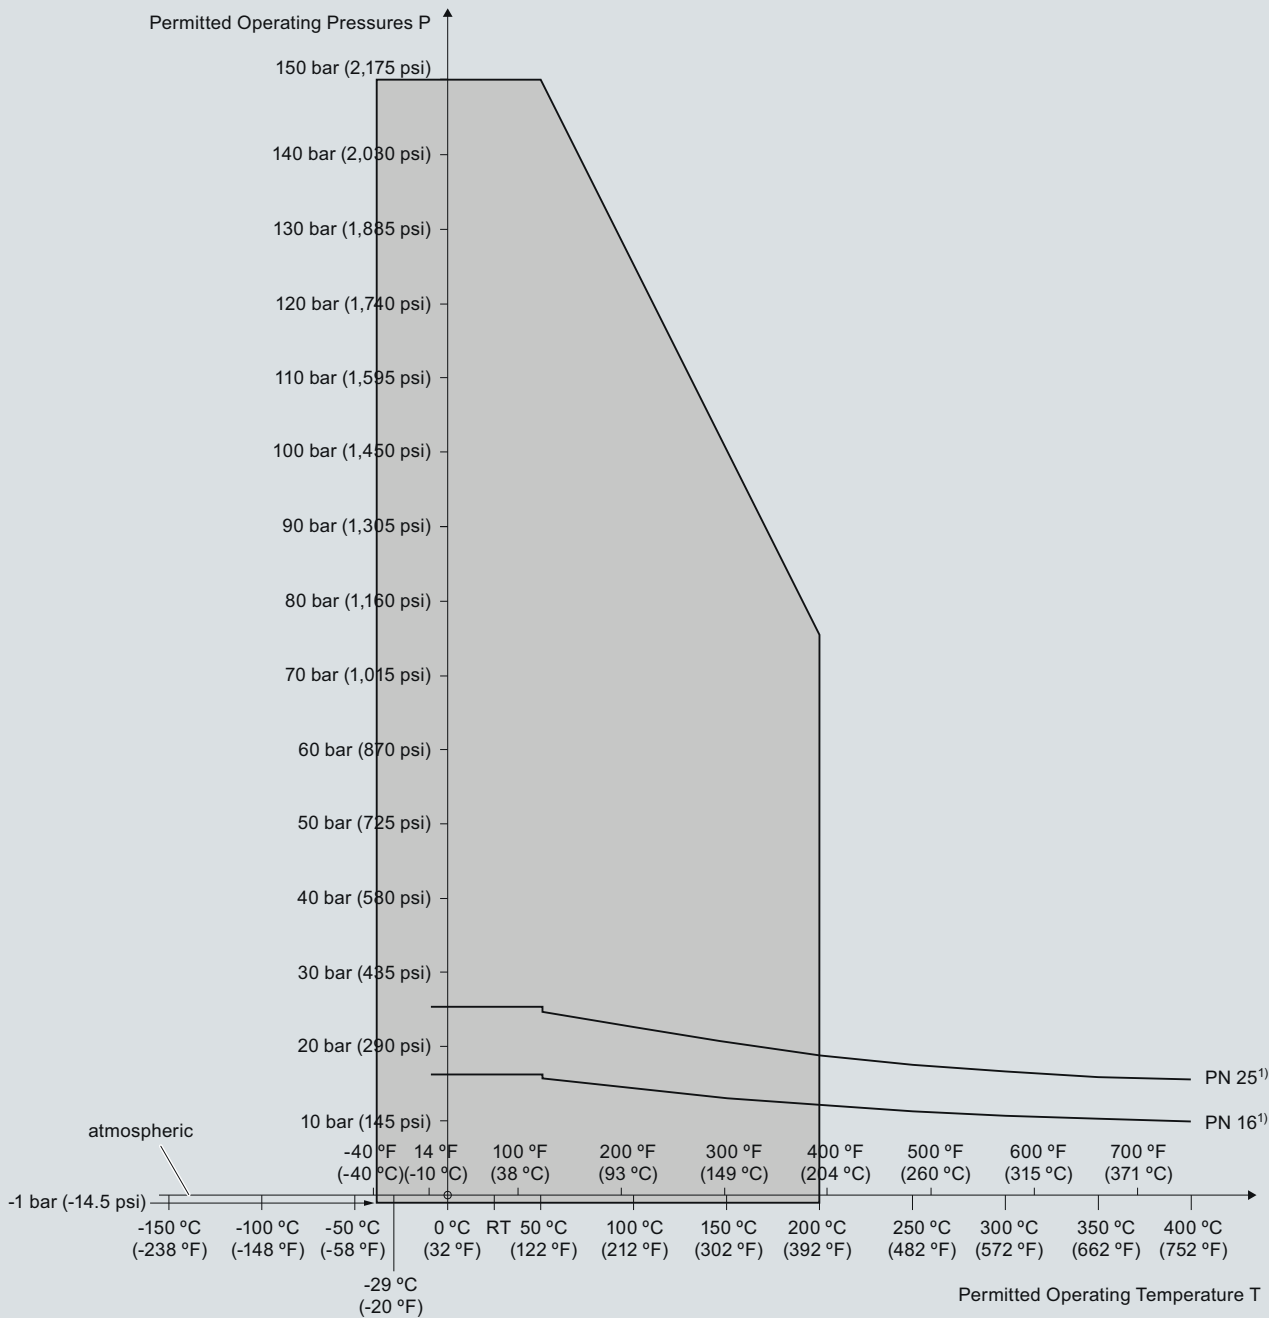

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS500 Process Pressure/Temperature derating curves (7ML5602 and 7ML5603)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pressure/Temperature Curve
CLS500 HighTemperature (no insulation)
ASME Flanged Process Connections
(7ML5604)

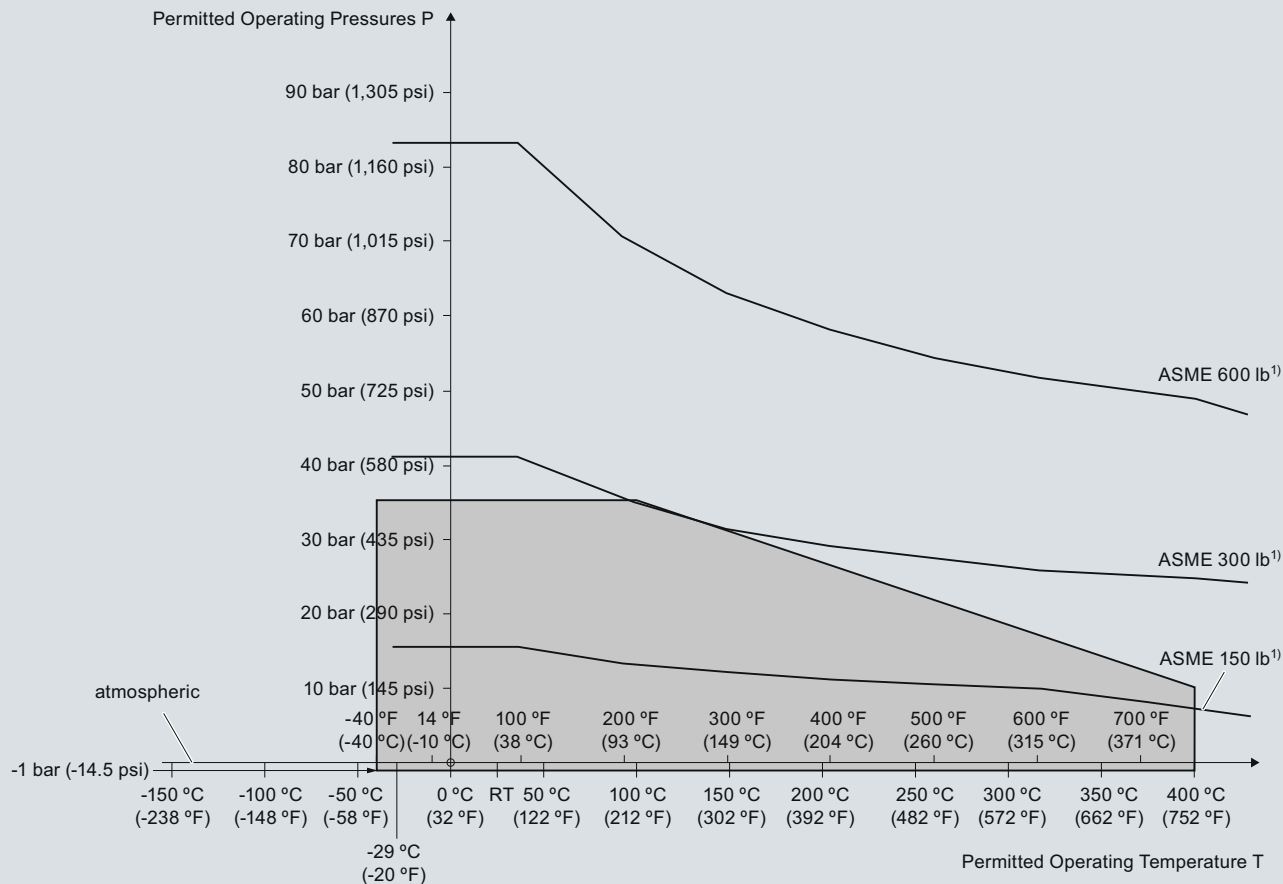

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS500 Process Pressure/Temperature derating curves (7ML5604)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pressure/Temperature Curve
CLS500 HighTemperature (no insulation)
EN Flanged Process Connections
(7ML5604)

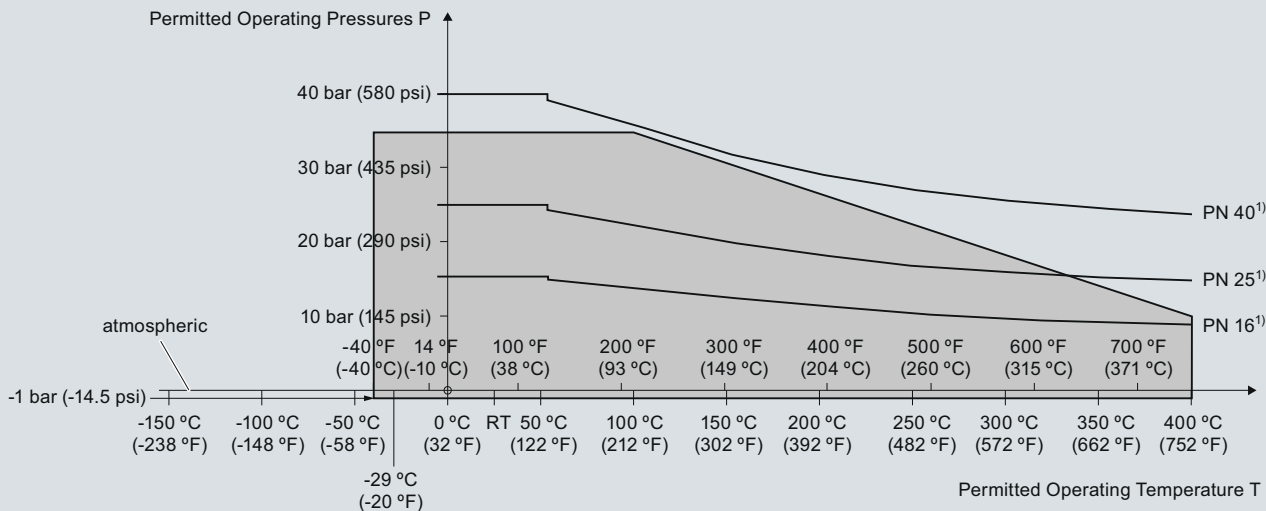

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5604)


Level Measurement

Point level measurement – Capacitance switches



Pointek CLS500

Dimensional drawings


Standard rod version
Threaded (7ML5601)

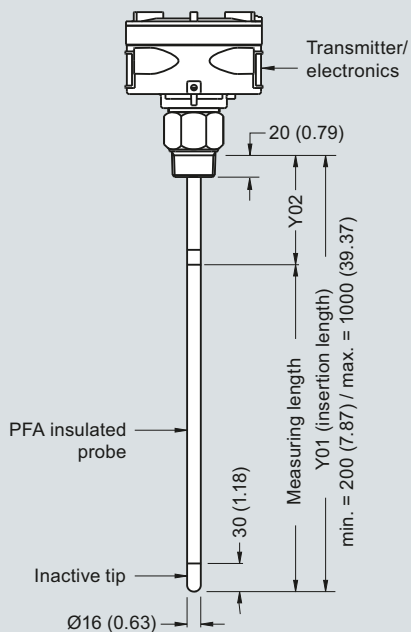


Standard configuration
(7ML5601)



With explosion-proof seal option
(all versions)



With thermal isolator option
(all versions)

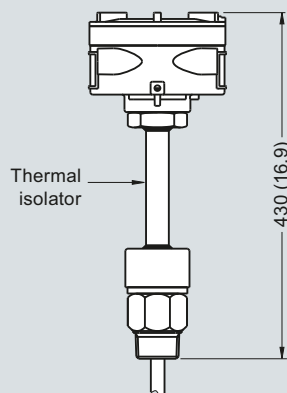


Pointek CLS500 dimensions - Threading Process connections, dimensions in mm (inch)

Level Measurement


Point level measurement – Capacitance switches

Pointek CLS500


Standard Rod version
Welded Flange (7ML5602)
Single Piece Flange (7ML5603)

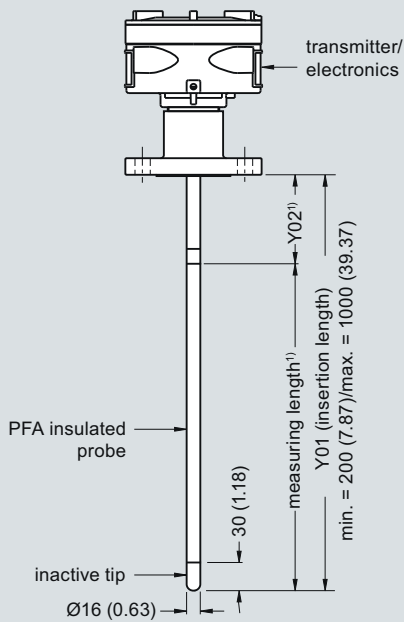


Standard configuration
(7ML5602, 7ML5603)

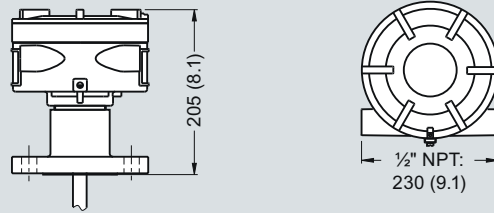


With explosion-proof seal option
(all versions)



With thermal isolator option
(all versions)

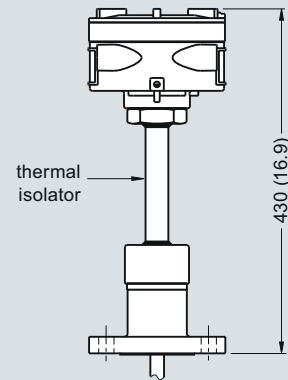

High temperature rod version
Welded Flange (7ML5604), Stainless steel rod⁴⁾

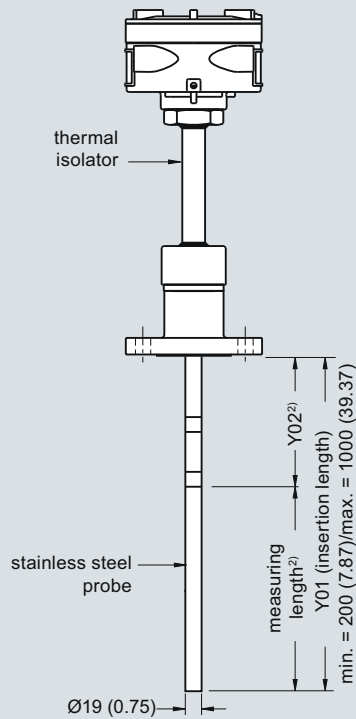

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/25/40/64	2 (0.08)

Notes:

- ¹⁾ Min. Y02 (active shield length) = 50 (1.96)
- ²⁾ Min. Y02 (active shield length) = 105 (4.13)
- ³⁾ Min. Y02 (active shield length) = 100 (3.94)
- ⁴⁾ Non conductive materials only

Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)


Pointek CLS500 dimensions - Flanged Process connections, dimensions in mm (inch)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Schematics

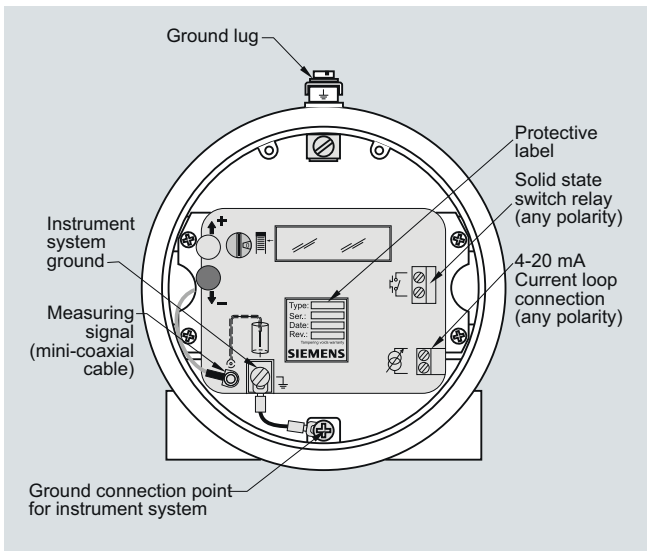

5

Pointek CLS500 connections







Level Measurement

Point level measurement – Capacitance switches




Pontek CLS Specials

Selection and ordering data

Pointek Specials. See note 1.

	Order No.
CLS100 Polycarbonate Lid and Gasket, FKM	
	
Kit, Lid and gasket, CLS100 enclosure version	F) A5E01163671
CLS100 Miscellaneous Parts	
Custom length of cable is available only for 7ML5501-xxx1x and 7ML5501-xxx5x	See note 2
CLS200 Gasket (IP65), Synprene	
	
Spare gasket, enclosure version (IP65 versions only)	F) A5E01163672
CLS200 Gasket (IP68), Silicone	
	
Spare gasket, enclosure version (IP68 versions)	F) A5E01163673
CLS200 Blind Lid	
	
Spare aluminum blind lid (for standard versions only)	A5E01163674
CLS200 Lid with window	
	
Spare aluminum lid with window	A5E01163676
CLS200 Sensor Kit for cable units	
	
Kit, Sensor for cable units, PPS, Standard, FKM	C) A5E01163677

Pointek Specials. See note 1.

Kit, Sensor for cable units, PPS, Digital, FKM	C)	A5E01163678
Kit, Sensor for cable units, PPS, Standard, FFKM	C)	A5E01163679
Kit, Sensor for cable units, PPS, Digital, FFKM	C)	A5E01163680
Kit, Sensor for cable units, PVDF, Standard, FKM	C)	A5E01163681
Kit, Sensor for cable units, PVDF, Digital, FKM	C)	A5E01163682
Kit, Sensor for cable units, PVDF, Standard, FFKM	C)	A5E01163683
Kit, Sensor for cable units, PVDF, Digital, FFKM	C)	A5E01163684
CLS200 Mounting Bracket, 316L stainless steel		
		
Spare mounting bracket		A5E01163685
CLS200 PROFIBUS Connector (IP65)		
		
Spare, PROFIBUS connector (IP65 versions only)		A5E01163686
CLS200 Miscellaneous Parts		
CLS200 with FFKM O-rings (any version)		See note 2
CLS200 Electronics		
Test magnet, digital version		7ML1830-1JE
Amplifier/power supply kit, standard version	C)	A5E03251681
Amplifier/power supply, digital version	L)	7ML1830-1JF
LCD display, digital version		7ML1830-1JK
CLS300 Cable Extensions, 316L stainless steel		
		
Kit, Stainless steel cable extension, 1 m, adjustable by customer		A5E01163688
Kit, Stainless steel cable extension, 3 m, adjustable by customer		A5E01163689
Kit, Stainless steel cable extension, 5 m, adjustable by customer		A5E01163690
Kit, Stainless steel cable extension, 10 m, adjustable by customer		A5E01163691
Kit, Stainless steel cable extension, 15 m, adjustable by customer		A5E01163693
Kit, Stainless steel cable extension, 20 m, adjustable by customer		A5E01163695

Level Measurement

Point level measurement – Capacitance switches

Pontek CLS Specials

Pointek Specials. See note 1.

CLS300 Cable Extensions, 316 stainless steel with PFA coating



Kit, PFA cable extension, 1 m, adjustable by customer

A5E01163697

Kit, PFA cable extension, 3 m, adjustable by customer

A5E01163698

Kit, PFA cable extension, 5 m, adjustable by customer

A5E01163699

Kit, PFA cable extension, 10 m, adjustable by customer

A5E01163700

Kit, PFA cable extension, 15 m, adjustable by customer

A5E01163701

Kit, PFA cable extension, 20 m, adjustable by customer

A5E01163702

CLS300 Rod Kits, 316L stainless steel



Kit, Stainless steel rod 180 mm (7.09 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 350 mm (13.78 inch).

A5E01163719

Kit, Stainless steel rod 330 mm (12.99 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 500 mm (19.69 inch).

A5E01163720

Kit, Stainless steel rod 580 mm (22.83 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 750 mm (29.53 inch).

A5E01163721

Kit, Stainless steel rod 830 mm (32.68 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 1000 mm (39.37 inch).

A5E01163722

Kit, Stainless steel rod 1330 mm (52.36 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 1500 mm (59.06 inch).

See note 2

Kit, Stainless steel rod 1830 mm (72.05 inch) to be used with CLS300 units only (with standard active shield). Insertion length after installation is 2000 mm (78.74 inch).

See note 2

Kit, Stainless steel rod customized length up to 1 m

See note 2

Kit, Stainless steel rod customized length up to 2 m

See note 2

CLS300 Electronics Kits with drivers (for rod or cable versions)



Kit, Electronics with driver, standard CLS300. C) To be used in rod or cable versions with length less than 5 m. See notes 3 and 4.

A5E01163723

Kit, Electronics with driver, digital CLS300. C) To be used in rod or cable versions with length less than 5 m. See notes 3 and 4.

A5E01163725

Pointek Specials. See note 1.

CLS300 Electronics Kits with drivers (for cable versions)



Kit, Electronics with driver, standard CLS300. C) To be used in cable versions with length greater than 5 m. See notes 3 and 4.

A5E01163724

Kit, Electronics with driver, digital CLS300. C) To be used in cable versions with length greater than 5 m. See notes 3 and 4.

A5E01163726

CLS300 Electronics

Test magnet, digital version

7ML1830-1JE

Amplifier/power supply kit, standard version C)

A5E03251683

Amplifier/power supply, digital version L)

7ML1830-1JF

LCD display, digital version

7ML1830-1JK

CLS300 Weight Kit, 316L stainless steel



Kit, Spare stainless steel weight. To be used in any cable version of CLS300

A5E01163727

CLS500 Gasket (IP65), Silicone



Spare gasket, CLS500 enclosure version, IP65

A5E01163728

CLS500 Blind Lid



Spare CLS500 aluminum blind lid

A5E01163729

CLS500 Electronics Kit

Transmitter, MSP 2002-1, 330 PF L)

7ML1830-1JP

Note 1: Special flange sizes and facings are available. Please contact ceg.smpi@siemens.com for part number and pricing. Submit Application Questionnaire found on page 5/9.

Note 2: Please contact ceg.smpi@siemens.com for part number and pricing.

Note 3: For General Purpose approvals only.

Note 4: To maintain approvals, qualified trained Siemens personnel required for part replacement.

Please contact ceg.smpi@siemens.com for special requests.

C) Subject to export regulations AL: N, ECCN: EAR99.

F) Subject to export regulations AL: 91999, ECCN: N.

J) Subject to export regulations AL: 91999, ECCN: EAR99.

L) Subject to export regulations AL: N, ECCN: 3A991X.