





Bench made with ductile iron legs treated with Ferrus, a protective process for iron that guarantees high corrosion resistance. Epoxy primer coating and black wrought iron coloured polyester powder coated finish. Ten tropical wood boards measuring 52 x 40 mm, treated with Lignus, a fungicide, insecticide and waterproofing agent. Mahogany colour finish.

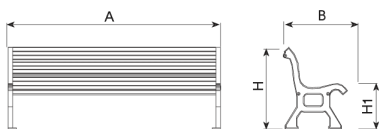

Ref.	A	B	H	H1
UM320	1995	620	750	415
UM320S	595	620	750	415



[Maintenance Manual:](#) | [Project Sheet:](#) | [CAD](#) | [Catalogue:](#) | [3D](#) | | [HD image](#)

Three stainless steel cross pieces and bolts.
Recommended anchoring: M10 expansion bolts, depending on the surface and the project.

ALTERNATIVES:



The constant improvement and evolution of our products may cause some modifications in the technical specifications and characteristics of the same without prior notice.