
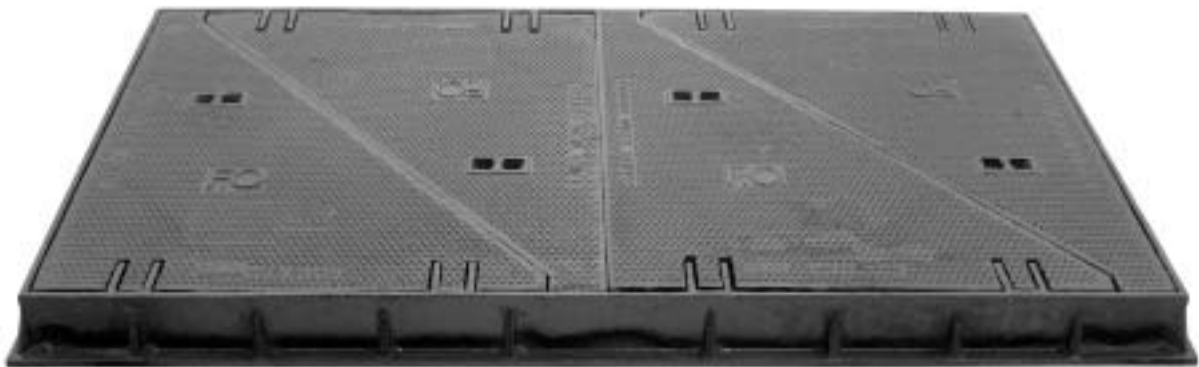


# MULTIPLE ACCESS COVER AND FRAME

MANHOLE COVER  
AND FRAME D-400

## Optical fiber


T1480D

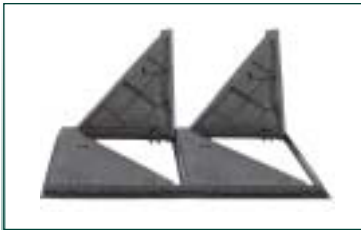

### DIMENSIONS

REFERENCE	A x B Ext. frame length	H Depth	C x D Cover length	P x P1 Clear opening	CHARACTERISTICS	UNITS PER PALETTE
OPTICAL FIBER T1480	880 x 880	100	790 x 790	760 x 760	D-400	8
OPTICAL FIBER <small>DUOBLE</small> T1480D	880 x 1650	100	790 x 1580	760 x 1540	Ductile iron	5

### CHARACTERISTICS

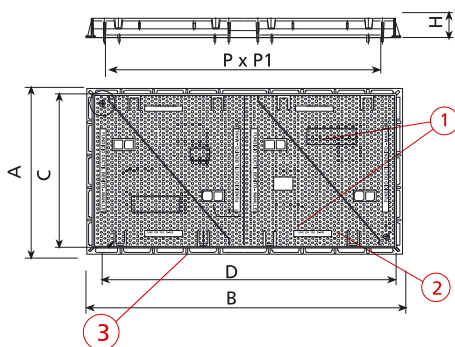

Made of ductile iron. Fulfils the requirements of European standards EN-124.

D-400 class.

Black paint coating.

Slip-proof surface.

It has 2 triangular tip-up manhole covers which can be opened separately. (1)

Hinge that guarantees easy opening and a secure exploration. Manhole cover blockage at 90°; and maximum opening at 120°. Manhole cover does not close accidentally. (2)

Joint rims surrounding the frame facilitate its installation.(3)