

Features

- Microprocessor based
- 4-20mA Analogue Output
- Voltage free relay contacts
- RS485 digital interface
- Alphanumeric dot-matrix display
- "One Person" calibration
- Small size
- Certified ATEX II 2 G Exd IIC T6
- Low power consumption
- Standalone operation



The Monicon S500L-OSV-832 is a self contained, intelligent gas sensor that offers a host of sophisticated features to provide fast, reliable warnings against concentrations of chlorofluorocarbon gases (CFC's) including R12, R22, R134a and R1234yf .


The S500L-OSV-832 will operate as a standalone instrument or in conjunction with a controller or a computer. The S500L-OSV-832 is housed in an attractive, compact enclosure and may be configured or calibrated by one person, without de-classifying the hazardous area. The gas concentration is indicated on a 4 character alphanumeric display which also indicates instrument status. The S500L-OSV-832 is user programmable and no physical adjustments are necessary during calibration as the on-board computer assists the calibration procedure. All user variables are stored in non-volatile memory (EEPROM) and retained indefinitely even during total power failure.

Typical Applications for the S500L-OSV-832

- Chemical processing
- Chemical storage
- Solvent storage
- Laboratories
- Plastics manufacture
- Packaging manufacture
- Insulation manufacture
- Refrigeration
- Aerosol manufacture


The S500L-OSV-832 uses a semiconductor gas sensor combined with advanced, surface-mount microprocessor and firmware technology. Gases and vapours being adsorbed onto the surface of a heated semiconductor element causes the electrical resistance of the semiconductor to change. This resistance change is measured, processed and linearised by the on-board CPU to give a signal proportional to the gas concentration. A watchdog circuit monitors the system operation and resets the CPU if a failure is detected.

The S500L-OSV-832 is calibrated or user-programmed by activating the magnetic switches with a magnet. The operator is then guided through a variety of options by a user-friendly menu. The CPU constantly verifies system operation. In the unlikely event of a fault, the operator is alerted with a helpful diagnostic display.

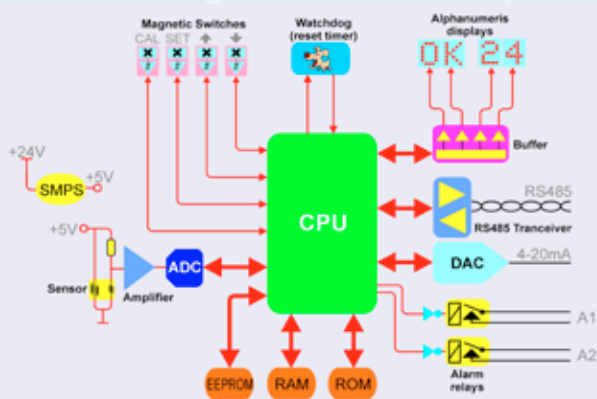

S500L-OSV-832 Specifications

Supply voltage	<i>Nominal 24Vdc (operates from 20Vdc to 35Vdc)</i>
Power consumption	<i>2W nominal, 2.3W maximum</i>
Circuit protection	<i>Electronic current limiter, 1.5A auto-reset</i>
Transient Protection	<i>PCB mounted, 3 Joule, Metal Oxide Varistor</i>
Analogue output	<i>4-20mA current source referenced to 0V</i>
Analogue output load	<i>500 Ohms maximum</i>
Operating temperature	<i>-10°C to +40°C</i>
Storage temperature	<i>-40°C to +66°C</i>
Humidity range	<i>20%RH to 80%RH (Non-condensing)</i>
Preconditioning Requirements	<i>Operational: 30 seconds, Specification: 24 hours</i>
Full-Scale range	<i>R22: 0-2000ppm, R134a: 0-3000ppm, R12: 0-5000ppm, R1234yf: 2000ppm</i>
Response time (T90)	<i>Typically <60 seconds</i>
Linearity	<i>±5%</i>
Repeatability	<i>±2%</i>
Resolution	<i>2%</i>
Sensor life	<i>Typically 3-5 years</i>
Weight	<i>2.0Kg (including sensor)</i>
RS485 operating mode (optional)	<i>Slave mode, half duplex, polled</i>
Max. units on RS485 loop	<i>100</i>
RS485 comm parameters	<i>1200-N-8-1</i>
RS485 error checking	<i>1 byte checksum</i>
Unit interrogation time	<i>40mS</i>
Relay contacts	<i>SPST, NO, 125V @ 0A5 (30V DC @ 1A) each for A1 & A2</i>
Option setting	<i>Digital setting (all options fitted as standard and user selectable)</i>
Alarm setting	<i>Digital setting (adjustable between 10% and 90% of full scale)</i>
Alarm types	<i>Energised/de-energised. Enrichment/deficiency. User selectable</i>
ATEX certification	<i>II 2 G Exd IIC T6 Tamb -20°C to +60°C (Certificate number Baseefa 08ATEX0056)</i>
Recommended calibration flow rate	<i>500mL per minute</i>
Mounting holes	<i>2 holes, diam 7mm, spaced 127mm</i>
User variable storage	<i>Non-volatile RAM (EEPROM)</i>
Electromagnetic Conformance (EMC)	<i>Complies with EN50081 and EN50082</i>
Cable gland entries	<i>2 entries, each M20 x 1.5</i>
Terminations	<i>PCB mounted terminal blocks to accept 1.5mm² cable</i>
Enclosure material	<i>Aluminium pressure die-casting, chromated with blue epoxy finish</i>

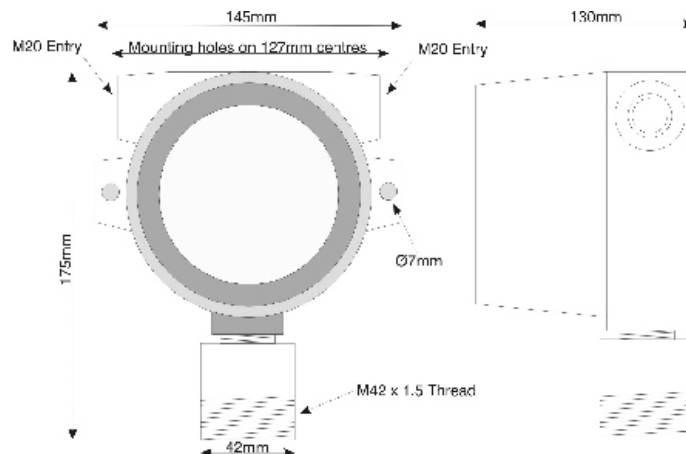

Monicon Technology Ltd
Ballybrit Industrial Estate
Monivea Road
Galway
Ireland

Tel: +353 91 752884
 Fax: +353 91 752886
 e-mail: sales@monicon.com
 web-site: www.monicon.com