

Punto D400 Round Manhole

Data Sheet: ISSUE 01



Punto is designed to support light traffic. It is perfect for installing on roads with an ADT of 500 to 1000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

Specification


- ◆ Ductile Iron (Spheroidal Graphite)
- ◆ EN-GJS-500-7 (Material Standard)
- ◆ EN124 - Class D400 (Product Standard)

Features

- ◆ Ball and socket joint - Easy opening guaranteed
- ◆ Elástico1 closure system
- ◆ 90° safety locking and maximum aperture angle of 115°
- ◆ Sound-proof joint included
- ◆ Metal non-slip surface
- ◆ Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.

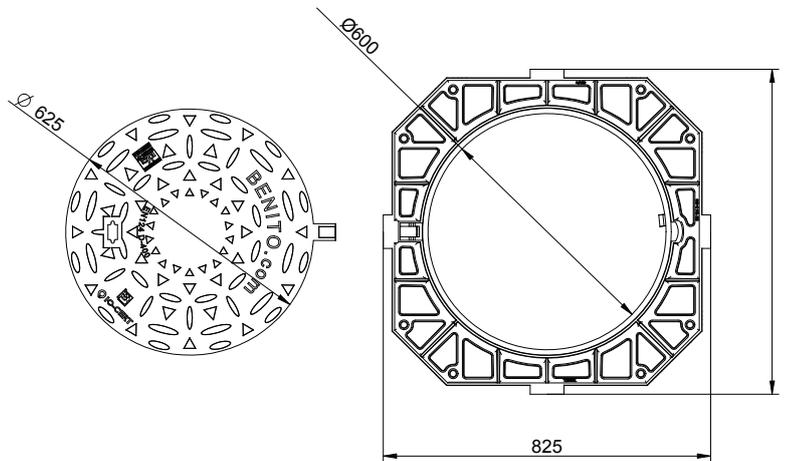

With optional closure

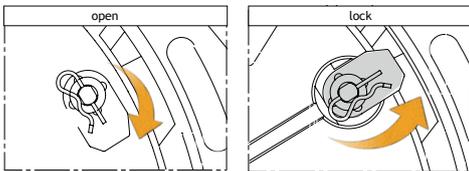

IPL group

Slane Road, Drogheda,
Co. Louth, Ireland.
Tel: +353 41 983 2591
Fax: +353 41 983 2599
Email: info@ipl.ie
Website: www.iplgroup.com



Technical Data

| EN124 Class | Frame Opening (mm) | Frame Size (mm) | Frame Depth (mm) | Weight (kg) | Waterway Area |
|-------------|--------------------|-----------------|------------------|-------------|---------------|
| D400 | Ø600 | 825x825 | 100 | 20 | n/a |

Group 4: Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles.



Further information on PUNTO manhole covers and gratings is available at www.iplgroup.com. Measurements and weights are approximate. The designs are the property of Innovative Products Ltd (IPL group) and may not be reproduced without express permission. Innovative Products reserve the right to amend specifications or to withdraw models without prior notice. © April 2017.