


MULTIGRIP MGR-F PN10 FLANGE ADAPTOR

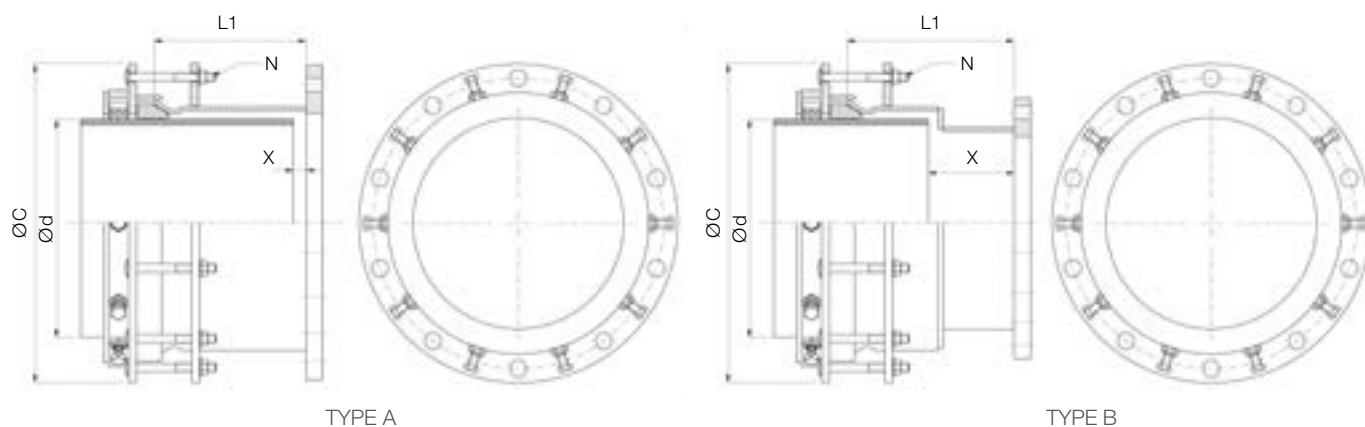

PN 10 RATED HYDRAULIC SEALING AND END RESTRAINT SYSTEM

Other sizes or ranges on request

DN	Ø d		Flange DN	Flange PN	Type	L1	Max. External Dimension Ø C	Compression Bolts	Gap X		Weight		
	Min.	Max.						Quantity N	Max.	Min.			
350	340	370	350	6-10-16	A	296	560	9	220	25	106		
	360	390		6-10-16			580				109		
400	385	415	400	6-10-16			600				122		
	415	445		6-10-16			640				127		
450	440	470	450	6-10-16			660				143		
	465	495		6-10-16			680					148	
500	490	520	500	6-10-16			720	160					
	515	545		6-10-16			740		165				
	545	575		6-10-16			B		326	788	14	250	170
600	595	625	600	6-10-16			A	296	808	15	220	25	203
	615	645		6-10-16					828				207
700	695	725	700	6-10-16					908				238
	720	750		6-10-16	933	255							
800	785	815	800	6-10-16	998	290							
	795	825		6-10-16	1008				292				
	825	855		6-10-16	1038					315			
900	885	915	900	6-10-16	1098	342							
	900	930		6-10-16	1113				345				
	930	960		6-10-16	1143					366			
1000	985	1015	1000	6-10-16	1198	403							
	1000	1030		6-10-16	1213				407				
	1030	1060		6-10-16	1243		460						
1200	1185	1215	1200	6-10-16	1398	556							
	1205	1235		6-10-16	1418		561						
	1240	1270		6-10-16	1453			580					
1400	1385	1415	1400	6-10-16	1598	-							
	1405	1435		6-10-16	1618		-						
	1445	1475		6-10-16	1658		30	-					

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range

This chart is for indicative purposes. Nova Siria srl can vary the indicated standards (tolerance range, dimensions and materials) according to specifications requested by Customers or to designing needs.

NOVA SIRIA end restraint fittings are suitable for the following pipes: steel, ci/DI, PE, pressure PVC.

All end restraint fittings installed on pe Or pressure PVC Pipes must be integrated with an internal reinforcing liner provided or approved by noVA SIRIA.