



MULTISIZE M40 FLANGE ADAPTOR

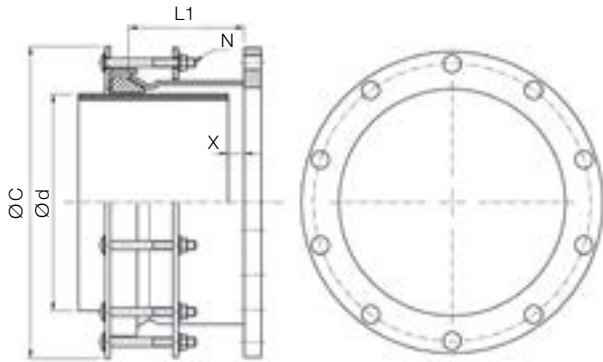

TYPE A

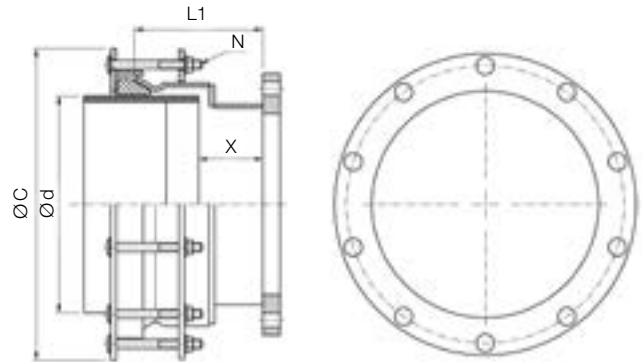

TYPE B

DN	Ød		Flange DN	Flange PN	Type	L1	Max. External Dimension ØC	Compression Bolts		Gap X		Weight
	Min.	Max.						Quantity N	Max.	Min.		
350	340	370	350	10-16	A	216	546	10	160	20	62	
	365	395		10-16			571				64	
400	390	420	400	10-16			596				12	73
	410	440	10-16	616			75					
450	438	468	450	10-16			644	14			88	
	465	495		10-16			671				90	
500	490	520	500	10-16			696				16	110
	518	548		10-16			724					112
600	590	620	600	10-16			796	18				150
	620	650		10-16			826					152
	652	676		10-16			819				154	
700	680	704	700	10-16			847				B	156
	700	724		10-16	867	158						
	726	750		10-16	893	161						
	754	778		10-16	921	165						
800	792	816	800	10-16	959	A	170	120	172			
	806	830		10-16	973		160	20	173			
	824	848		10-16	991		175					
	856	880		10-16	1023		177					
900	882	906	900	10-16	1049	B	194					
	902	926		10-16	1069		160	20	196			
	934	958		10-16	1101		198					
	960	984		10-16	1127		170	120	200			
1000	996	1020	1000	10-16	1163	A	235					
	1016	1040		10-16	1183		160	20	237			
	1036	1060		10-16	1203		239					
	1068	1092		10-16	1235		22	170	120	241		
	1100	1124		10-16	1267			244				
	1116	1140		10-16	1283			180		245		
	1140	1164		10-16	1307		24	247				
1200	1180	1204	1200	10-16	1347	A	308					
	1206	1230		10-16	1373		160	20	310			
	1244	1268		10-16	1411		26	313				

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range Multisize series and wide range steel fittings provide the maximum hydraulic seal, however they do not restrain axial pipes movement (for this type of products please refer to the MULTIGRIP section)