

Intelligent Foundation Solutions

RETENTION SYSTEM sockets are intelligent foundation solutions for the installation and maintenance of posts.

Essential to sustainable infrastructure design, they add value through improved asset management and performance, reduced operational costs and deliver environmental, health and safety benefits.



world leading design...

- Designed and tested to international standards
- Approved and used throughout the world
- High-strength, reusable design survives vehicle impact
- Solution for knock-down and access-control locations
- Eliminates repeat excavation, disruption and expense
- Shallow foundation options for congested sites
- Easy to handle, adjust and install on site
- Facilitates electrical cabling at ground level
- Simplifies project, contractor & site management
- Assists maintenance and seasonal schedules
- Supports health and safety work practices
- Promotes environmental policies and targets

Sustainable Infrastructure Design



RSe200

RSe200 socket for the installation of Ø200mm (8in) posts including traffic signals, signs, lighting columns...

RETENTION SYSTEM

sockets for post installation



RS sockets are available in common industry sizes and post installation depths. Base options include: standard [flat] / duck-foot & tee bends for cable access / shallow foundation. RS engineered sockets are made to size, specification and installation requirements.

www.iplgroup.com

- » Facilitates Passive Safety design to EN12767
- » Foundation size and specification to EN40 & BD94/07
- » Product tested and load rated to EN124 B125

IPL group | +353 (0) 41 983 2591






RS socket installation & specification...


The **RS socket** should be set into concrete generally in accordance with International Standards or good Codes of Practice for the installation of posts.

1. Prepare hole at least 75mm deeper than the overall height of the **RS socket**. If depth for **RS socket** cannot be achieved, unit can be shortened on site. Please contact your supplier for technical support.
2. Compact at least 75mm of MOT type 1 granular material in base of hole.
3. Position **RS socket** in centre of hole. For cabled installations connect ducting from remote chamber to swivel bend on socket. Leave draw cord in base of **RS socket** bend.
4. Rotate the **RS socket** head into the required orientation.
5. Remove locking lid, loosen the two M16 locking set-screws and remove the pedestrian plug.
6. Install a levelling post (stump pole) in the **RS socket**, fasten the locking set-screws and replace the locking chamber lid.
7. Surround with the required amount of concrete (ST4 mix or stronger). Use stump pole to achieve a vertical level.
8. Once vertical level is achieved, compact concrete.
9. Once concrete has been compacted and has begun to cure, carefully remove stump pole and lock the pedestrian plug in place.
10. Replace the locking chamber lid and secure in position. Finish footway with required surface when concrete has cured.

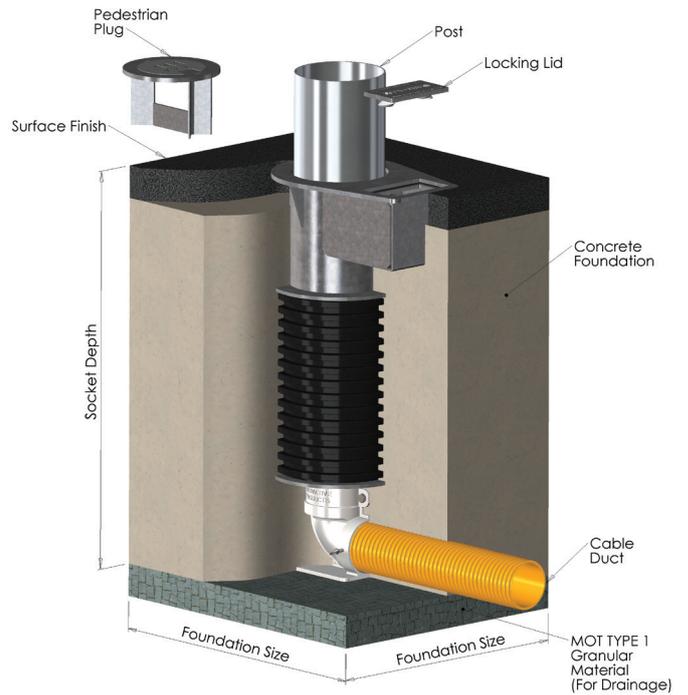

See **RS socket** installation guide for EN40-3-1:2000 foundation guidelines
For detailed foundation sizing on specific site conditions contact your supplier.

RSe200 socket for the installation of Ø200mm (8in) posts

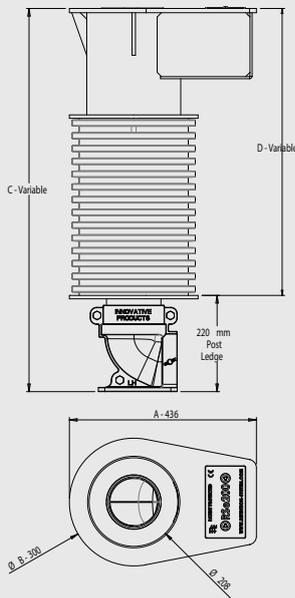

Ref No:	Base Type	A (mm)	B (mm)	C* (mm)	D** (mm)	Weight (kg)
RSe200x300sf	shallow foundation	436	300	300	210	40
RSe200x300	standard [flat]	436	300	300	300	32.5
RSe200x450	standard [flat]	436	300	450	450	34
RSe200x600	standard [flat]	436	300	600	600	36
RSe200x600df	duck foot bend	436	300	600	380	46.8
RSe200x600t	tee bend	436	300	600	380	49.7
RSe200x750	standard [flat]	436	300	750	750	37.5
RSe200x750df	duck foot bend	436	300	750	530	48.7
RSe200x750t	tee bend	436	300	750	530	52.3
RSe200x900	standard [flat]	436	300	900	900	39.8
RSe200x900df	duck foot bend	436	300	900	680	50.6
RSe200x900t	tee bend	436	300	900	680	54

Options:

rs stump pole
RSe200x1000 / RSe200x1220df / RSe200x1220t
(non-standard foundation depths & base types per specification)

Material Specification:

Head, Plug, Locking Lid:	Mild Steel
Body:	PE - Polyethylene Twin Wall
Flat Base:	Mild Steel
Duck Foot Bend:	Ductile Iron (BS2789 500-7)
Tee Bend:	Ductile Iron (BS2789 500-7)
Set-screws:	M24 A2 Stainless Steel
Assembly Screws:	M12 A2 Stainless Steel
Finish:	Galvanised

RSe200

C* rs socket foundation depth
D** post insertion depth

Technical drawings for all rs sockets available from **IPL group**.

Drawings not to scale, illustrations, technical data, dimensions and weights are subject to alteration without notice.

